


Switchboard matting Class 2

VRTRADE

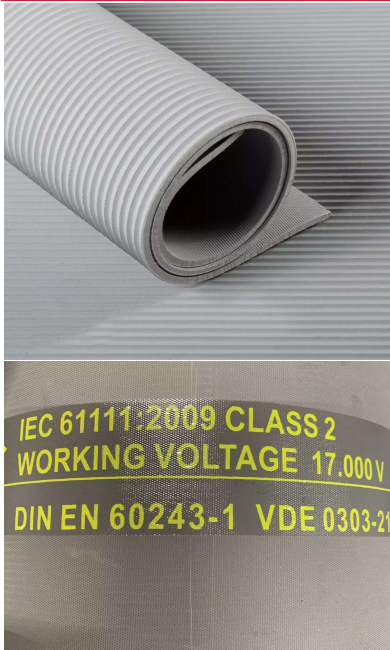

MECHANICAL	Standard	Value	
Rubber compound		SBR	
Density	ASTM D397	1.60 +/-0.05	g/cm3
Hardness	ASTM D2240	65° ± 5°	Shore A
Tensile strength	ASTM D412	4	MPa
Elongation at break	ASTM D412	200	%
Certification	IEC 61111:2009 / DIN EN 60243-1 / VDE0303		

TEMPERATURE

Working temperature -30°C / +90°C

IEC 61111:2009 Class 2

Working Voltage 17.000 V

Proof Voltage 20.000 V

Withstand Voltage 30.000 V

DIMENSIONS

SKU	Thickness (mm)	Width (mm)	Length (m)	Colour	Class
VR30104970HT	4	1000	10	Grey	Class 2 - 30 kV
VR30104980HT	4	1200	10	Grey	Class 2 - 30 kV