


# Switchboardmatting Class 4

**VRTRADE**

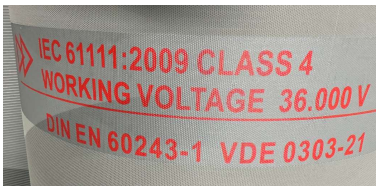

MECHANICAL	Standard	Value		Test Method	
Rubber compound		SBR			
Density	ASTM D397	1.60 +/-0.05	g/cm3	ASTM D397	
Hardness	ASTM D2240	65 <sup>0</sup> +/-5	Shore A	ASTM D2240	
Tensile strength	ASTM D412	4	MPa	ASTM D412	
Elongation at break	ASTM D412	200	%	ASTM D412	
Tear resistance					
Compression set after 24h at 70°C					
TEMPERATURE					
Working temperature		-30°C - +90°C			
CERTIFIED					
According to		IEC 61111:2009 / DIN EN 60243-1			
Working Voltage		36.000 V			
Proof Voltage		40.000 V			
Withstand Voltage		50.000V			
DIMENSIONS					
SKU	Thickness (mm)	Width (mm)	Length (m)	Colour	Execution
VR30104990HT	6.5	1000	10	grey	small ribbed top
VR30105000HT	6.5	1200	10	grey	small ribbed top